


AXM / AWM CORE BARREL

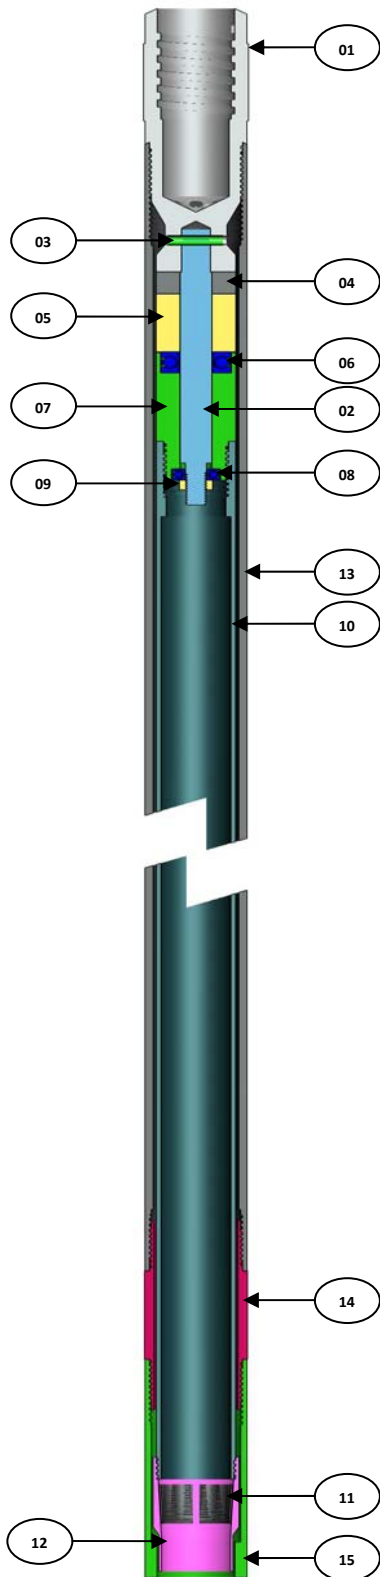


	ITEM DESCRIPTION	PART NUMBERS
1-15	AWM CORE BARREL ASSEMBLY 3.0 M	70-00-100
1-15	AWM CORE BARREL ASSEMBLY 1.5 M	70-00-110
1-9	AWM HEAD ASSEMBLY	70-00-200
01	HEAD	70-01-001
02	SPINDLE	70-01-002
03	SPRING DOWELL	70-01-003
04	RUBBER SPACER	70-01-004
05	SPACER BUSH	70-01-005
06	THRUST BEARING	70-01-006
07	BEARING SPINDLE	70-01-007
08	THRUST BEARING	70-01-008
09	HEX NUT	70-01-009
10	INNER TUBE	70-03-001
10	INNER TUBE	70-03-002
11	CORE LIFTER	70-03-003
12	CORE LIFTER CASE	70-03-004
13	OUTER TUBE	70-02-001
13	OUTER TUBE	70-02-002
14	BLANK REAMING SHELL	70-02-003
15	BIT BLANK	70-02-004

ALL KUVAWALA CORE BARRELS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES AND STRAIGHTNESS BETTER THAN 1 : 2000 .

STANDARD KUVAWALA CORE BARRELS HAVE HEAT TREATED ALLOY STEEL HEADS WHICH COME WITH HARD METAL STRIPS ON THE DIAMETER OF THE HEAD WHICH ARE 60 Rc TO 65 Rc .

OPTIONALLY WE ALSO SUPPLY STANDARD CORE BARRELS WITH 18" LONG HARD CHROME PLATING AT BOTH ENDS OF THE OUTER TUBE AT EXTRA COST. THIS INCREASES THE LIFE OF THE OUTER TUBE EXPONENTIALLY.

BWM CORE BARREL

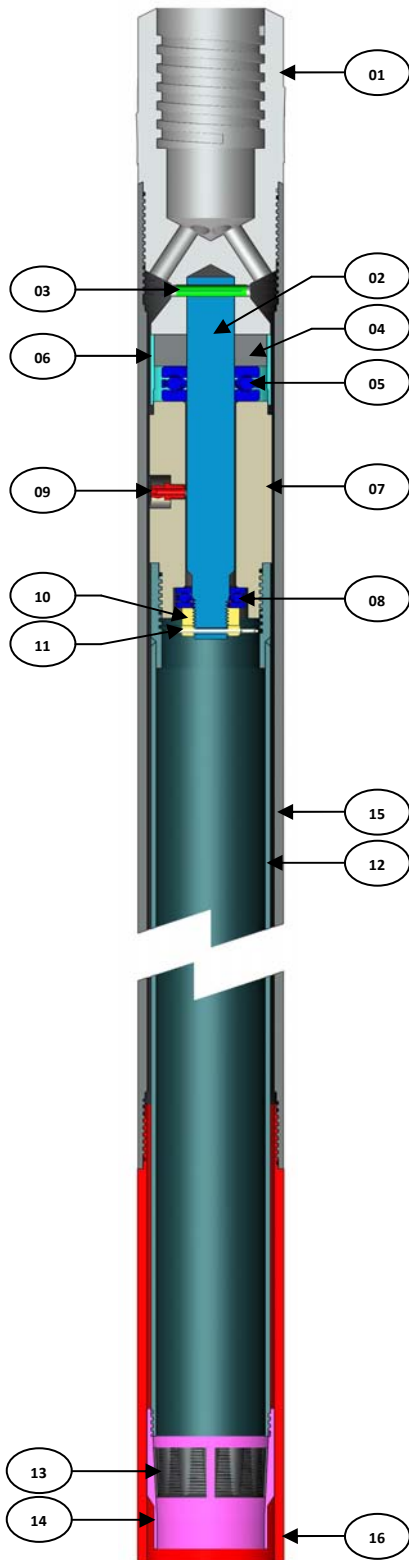


	ITEM DESCRIPTION	PART NUMBERS
1-16	BWM CORE BARREL ASSEMBLY 3.0 M	72-00-100
1-16	BWM CORE BARREL ASSEMBLY 1.5 M	72-00-110
1-11	BWM HEAD ASSEMBLY	60-00-200
01	HEAD	60-01-001
02	SPINDLE	60-01-002
03	SPRING DOWELL	60-01-003
04	RUBBER SPACER	60-01-004
05	THRUST BEARING	60-01-005
06	BEARING COVER	60-01-006
07	BEARING SPINDLE	60-01-007
08	THRUST BEARING	60-01-008
09	GREASE FITTING	16-03-024
10	CASTLE NUT	60-01-009
11	COTTER PIN	60-01-010
12	INNER TUBE 3.0 M	72-03-001
12	INNER TUBE 1.5 M	72-03-002
13	CORE LIFTER	72-03-003
14	CORE LIFTER CASE	72-03-004
15	OUTER TUBE 3.0 M	72-02-001
15	OUTER TUBE 1.5 M	72-02-002
16	THREAD PROTECTOR	72-02-003

ALL KUVAWALA CORE BARRELS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES AND STRAIGHTNESS BETTER THAN 1 : 2000 .

STANDARD KUVAWALA CORE BARRELS HAVE HEAT TREATED ALLOY STEEL HEADS WHICH COME WITH HARD METAL STRIPS ON THE DIAMETER OF THE HEAD WHICH ARE 60 Rc TO 65 Rc .

OPTIONALLY WE ALSO SUPPLY STANDARD CORE BARRELS WITH 18" LONG HARD CHROME PLATING AT BOTH ENDS OF THE OUTER TUBE AT EXTRA COST. THIS INCREASES THE LIFE OF THE OUTER TUBE

NWM CORE BARREL

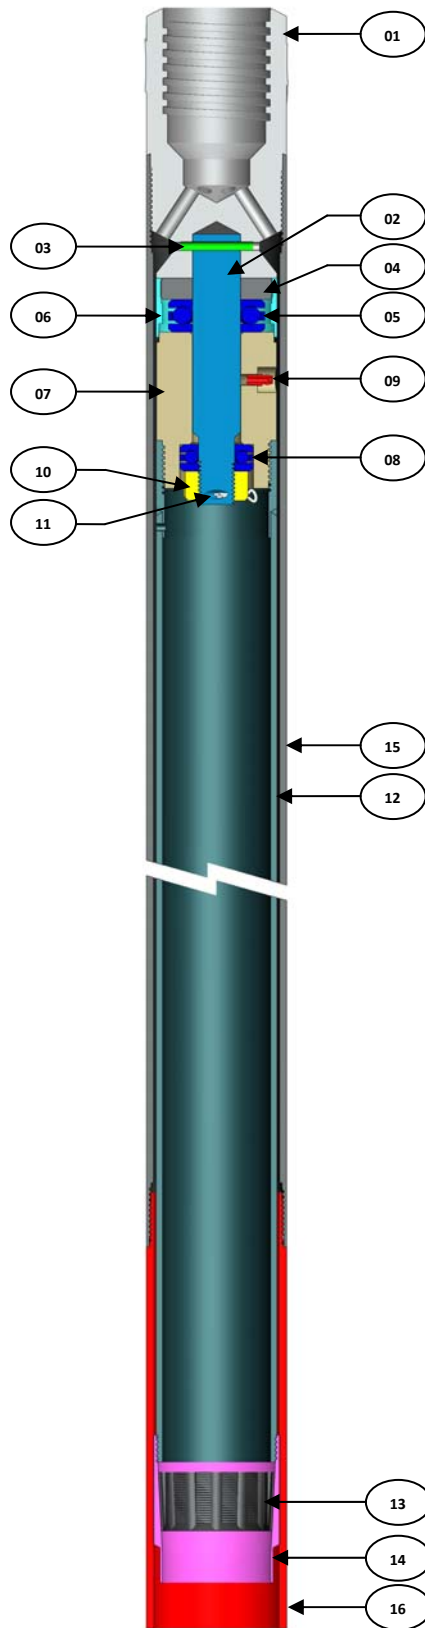

	ITEM DESCRIPTION	PART NUMBERS
1-16	NWM CORE BARREL ASSEMBLY 3.0 M	74-00-100
1-16	NWM CORE BARREL ASSEMBLY 1.5 M	74-00-110
1-11	NWM HEAD ASSEMBLY	62-00-200
01	HEAD	62-01-001
02	SPINDLE	62-01-002
03	SPRING DOWELL	62-01-003
04	RUBBER SPACER	62-01-004
05	THRUST BEARING	62-01-005
06	BEARING COVER	62-01-006
07	BEARING SPINDLE	62-01-007
08	THRUST BEARING	62-01-008
09	GREASE FITTING	16-03-024
10	CASTLE NUT	62-01-009
11	COTTER PIN	62-01-010
12	INNER TUBE 3.0 M	74-03-001
12	INNER TUBE 1.5 M	74-03-002
13	CORE LIFTER	74-03-003
14	CORE LIFTER CASE	74-03-004
15	OUTER TUBE 3.0M	74-02-001
15	OUTER TUBE 1.5M	74-02-002
16	THREAD PROTECTOR	74-02-003

ALL KUVAWALA CORE BARRELS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES AND STRAIGHTNESS BETTER THAN 1 : 2000 .

STANDARD KUVAWALA CORE BARRELS HAVE HEAT TREATED ALLOY STEEL HEADS WHICH COME WITH HARD METAL STRIPS ON THE DIAMETER OF THE HEAD WHICH ARE 60 Rc TO 65 Rc .

OPTIONALLY WE ALSO SUPPLY STANDARD CORE BARRELS WITH 18" LONG HARD CHROME PLATING AT BOTH ENDS OF THE OUTER TUBE AT EXTRA COST. THIS INCREASES THE LIFE OF THE OUTER TUBE EXPONENTIALLY.